



★ SINCE 1947 ★

DEKS
SOLAR
SOLUTIONS
BY DESIGN



SOLARDEK™

SOLAR WATERTIGHT MADE A REALITY

Solar Panel | Cable Roof Flashing | Solar Thermal

The focus on renewable energy has never been so large. The solar panel market lacks a purpose made solution for ensuring watertight solar panel pipe and cable penetrations. Our innovation team have created safe, easy and watertight flashing solutions. Available for both Solar PV and Solar Thermal applications.

EPDM is used for Solar PV Cable penetrations. Silicone is used for Solar Thermal applications, ensuring protection against hot pipes whilst blending into the solar panel installation.



Special Flashing

Made for Solar Thermal & PV Installations

Ensures

Safe, Easy & Watertight Seals

Made for

Tile, Slate & Metal Roofs

DEKTITE® Multicable Solar Flashings

DNLS10MB



SDA10MB



The speciality flashing for solar PV cables on tile or slate roofs.



- Black EPDM High UV Resistance cone
- Available in Aluminium or Nu-Lead® Base
- Weather Seals and Protects up to 10 Cables
- Purpose-made durable solution to MCS

PIPE EXTERNAL	ROOF PITCH	BASE SIZE	BASE TYPE	CODE
				BLACK EPDM
4 - 8mm	Any	490 x 410mm	Nu-Lead®	DNLS10MB
4 - 8mm	Any	450 x 600mm	Aluminium	SDA10MB
BLACK EPDM	EPDM will withstand constant temperatures at the roofline of -50°C to 115°C and up to 150°C intermittently			

DNL100B



SDAMINI



DNLS200MPG



SOLARDEK™ Speciality Flashing for Solar Thermal Installations

The purpose-designed SolarDek™ provides the safest, most efficient method of flashing solar thermal pipes and cables on tile and slate roofs. SolarDek™ features the Nu-Lead® base, which will not stain or corrode the roof, together with a long-life Dektite® EPDM or grey silicone cone ideally suited to solar thermal pipe sizes.



- Grey High Temperature Seal
- Complete Weather Proofing
- Safe Protected Nu-Lead® Apron
- Purpose-made Durable Solution to MCS

PIPE EXTERNAL	ROOF PITCH	BASE SIZE	BASE TYPE	CODE
				BLACK EPDM
0 - 35mm	0 - 45°	490 x 410mm	Nu-Lead®	DNL100B
0 - 30mm	0 - 45°	450 x 600mm	Aluminium	SDAMINIB
BLACK EPDM	EPDM will withstand constant temperatures at the roofline of -50°C to 115°C and up to 150°C intermittently			

PIPE EXTERNAL	ROOF PITCH	BASE SIZE	BASE TYPE	CODE
				GREY SILICONE
0 - 35mm x 2	0 - 45°	490 x 410mm	Nu-Lead®	DNLS200MPG
GREY SILICONE	Silicone will withstand constant temperatures at the roofline of -50°C to 200°C and up to 250°C intermittently			

DEKTITE® PREMIUM SOLAR

Perfect for Flashing Pipes and Cables on Metal Roofs

The multi-application flashing in a highly durable EPDM or silicone, edged with a flexible aluminium band, flashes pipes and cables on metal roofs. The square base fits most roof profiles.



**Dektite® Premium
DFE 100/200**



**Dektite® Premium
DFE 101/201**



**Dektite® Premium
Multicable
DFE101BM**

- For solar pipes or cables
- Suits most roof profiles
- High UV resistance
- Protects up to 12 cables and weatherproofs entry to any metal roof
- Purpose-made durable solution, as required by MCS

PIPE EXTERNAL	CABLE EXTERNAL	ROOF PITCH	BASE SIZE	CODE			FIXING KIT SIZE
				BLACK EPDM	GREY EPDM	RED SILICONE	
0 - 35mm	4 - 8mm	0 - 45°	100 x 100mm	DFE100BS	DFE100GS	DFE200RES	FX901
5 - 55mm	4 - 8mm	0 - 45°	139 x 139mm	DFE101BS	DFE101GS	DFE201RES	FX901
N/A	4 - 8mm	Any	139 x 139mm	DFE101BM	N/A	N/A	FX901
EPDM	EPDM	EPDM will withstand constant temperatures at the roofline of -50°C to 115°C and up to 150°C intermittently					
RED SILICONE		Silicone will withstand constant temperatures at the roofline of -50°C to 200°C and up to 250°C intermittently					



DEKTITE® FIXING KITS

Dektite® fixing kits are designed for use with DEKS EPDM and Silicone flashings on metal fibre and cement roofs.

The **FX901 Kit** contains 1 x 75ml tube of low modulus silicone, 25 x self-drilling screws, 25 x colour caps (silver).

PACK	CODE
Fixing Kit 1	FX901
Fixing Kit 2	FX902

The **FX902 Kit** (as shown) contains 3 x 75ml tubes of low modulus silicone, 75 x self-drilling screws, 75 x colour caps (silver).

Self-drilling screws should be placed 25-50mm apart.

SOLARDEK™ RUBBER FOOT

Environmentally friendly recycled rubber materials

The SolarDek Rubber Foot complies with the EU ROHS standard. Rubber Feet are supplied with Aluminium 41 x 21 channel section rail with 2 x locking cam bolt, nut, washer and spirit level. The products are a floor mounted rubber support designed to support Air Source Heat Pumps (ASHP), pipe work/cable trays and HVAC units. Additionally, the feet provide moderate amounts of noise and vibration absorption. Suitable for external and internal locations for temperatures between -40°C to 80°C.



Model No.	Description	Specification				Weight (kg/pair)	Qty/ Pallet	Bearing weight (kg/pcs)	Component
		A (mm)	B (mm)	C (mm)	D (mm)				
SDRF-250	SolarDek Rubber Foot 250mm (80-220kg)	250	163	98	210	4.87kg	210	80-220	2 sets of screws & level
SDRF-400	SolarDek Rubber Foot 400mm (130-330kg)	400	163	98	360	7.33kg	140	130-330	2 sets of screws & level
SDRF-600	SolarDek Rubber Foot 600mm (250-600kg)	600	163	98	560	10.86kg	80	250-600	2 sets of screws & level
SDRF-1000	SolarDek Rubber Foot 1000mm (300-1000kg)	1000	163	98	960	17.93kg	50	300-1000	2 sets of screws & level

DEKS FAST FLASH® - BBA ACCREDITED

Self-adhesive and user-friendly Lead replacement material

Fast Flash® is ideal for any application requiring a quick and secure flashing solution.

Fast Flash® can be installed on roofs with a minimum slope of 5° and on almost all roof materials. Fast Flash® is environmentally friendly and easy to install, as the reverse is self-adhesive, as well as being flexible and very workable.

If painting is required or where water is likely to travel from copper or bitumen onto Fast Flash®, use 100% acrylic low sheen exterior paint.



Easy to Install

Light weight, easy to trim and fully self-adhesive

Flexible and Very Workable

Malleable and stretchable. Dresses well to all profiles

Product Range

Rolls in four standard sizes, and colours black, grey and anthracite grey. (Grey colour matches old/worn Lead. Anthracite grey matches new Lead)

Environmentally Friendly


Aluminium stretch mesh cast in polymer rubber

Slower-Set Adhesive

Allows time for repositioning - 20/30 mins

Solutions

Ideal solution for flashing in roof solar panels, around roof lights, abutments and chimney stacks etc.

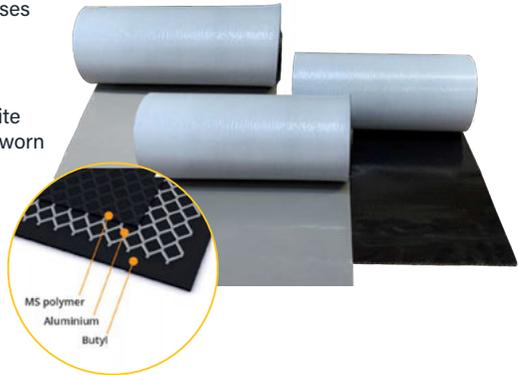

PRODUCT CODE	DESCRIPTION	WEIGHT
FFR5-140G	140mm x 5m Roll - Grey	2.4kg
FFR5-280G	280mm x 5m Roll - Grey	4.7kg
FFR5-370G	370mm x 5m Roll - Grey	5.9kg
FFR5-560G	560mm x 5m Roll - Grey	9.2kg
FFR5-140B	140mm x 5m Roll - Black	2.4kg
FFR5-280B	280mm x 5m Roll - Black	4.7kg
FFR5-370B	370mm x 5m Roll - Black	5.9kg
FFR5-560B	560mm x 5m Roll - Black	9.2kg
FFR5-140AG	140mm x 5m Roll - Anthracite Grey	2.4kg
FFR5-280AG	280mm x 5m Roll - Anthracite Grey	4.7kg
FFR5-370AG	370mm x 5m Roll - Anthracite Grey	5.9kg
FFR5-560AG	560mm x 5m Roll - Anthracite Grey	9.2kg

PERFORM® HAMMER Shaping the covering material



For best results when shaping the covering material to suit profiled roofing, use a Perform® Hammer.

CODE	DESCRIPTION	WEIGHT
HAMMER	Perform® Hammer	0.5kg

SolarDek™ HookFlash




The complete flashing solution for on-roof installations

The SolarDek™ HookFlash provides a sealing solution for on-roof solar when roof hooks need to be flashed on slate, concrete or flat profile tiles. This together with the Dektite® Multicable solar flashing provides the installer with a water tight peace of mind solution for on-roof solar installations.



Kits includes 1 x SolarDek™ HookFlash and foam insert to flash over on-roof solar roof hooks.
Visit - www.deks.co.uk/hookflash

CODE	BASE SIZE
SDHF - S	245 x 230mm
SDHF - L	360 x 360mm

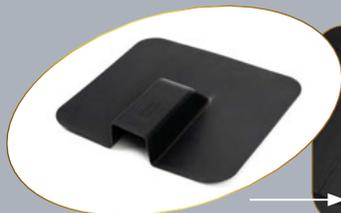

SolarDek™ PanelDrain



Discover the ultimate solution for maintaining the efficiency and longevity of your solar panels with SolarDek's new PanelDrain. This innovative water drain clip is specifically designed to enhance solar panel performance by eliminating water and dust accumulation, making it perfect for low-tilt installations from 3° up to 15°.

Visit - www.deks.co.uk/paneldrain



Panel Drain Clips

Various size options available


CODE	BASE SIZE
SDPD - 30	30mm
SDPD - 32	32mm
SDPD - 35	35mm

SolarDek™ TileFlash®



Tile flashing solution for on-roof installations

Innovative tile and cable flashing solution for flat tiles. Enables up to 4 cables to pass through the rubber tile as well as creating a cushion for the solar hook. Lower profile design also creates less tile lift when installed with the solar hook. Your dual-purpose flat tile mounting solution.

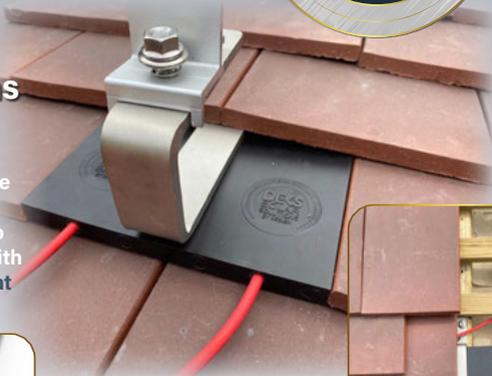

CODE	BASE SIZE
SDTF - RO	250mm x 165mm



SolarDek™ Bird Brush





Avoid nesting birds and filthy mess on your solar panels... **FIT BIRD BRUSH!**

Introducing one of the fastest fitting bird protection products on the market. Specifically designed for on-roof solar, enabling the installer to create a bird proof solution in double quick time. The brush design offers an unobtrusive flexible solution which does not need any special tools or clips to be fitted.



CODE	BASE SIZE
SDBB - 1m	Length - 1m
	Diameter - 160mm





 sales@deks.co.uk

 www.deks.co.uk

 01275 858 866



DEKS Industries Europe Ltd
West End Trading Estate
Blackfriars Road
Nailsea, Bristol, BS48 4DJ

While every effort has been made to ensure that the details in this brochure are correct at the time of print, we cannot accept responsibility for any errors or omissions.